


Motive Power Block Batteries

Flooded

FT range

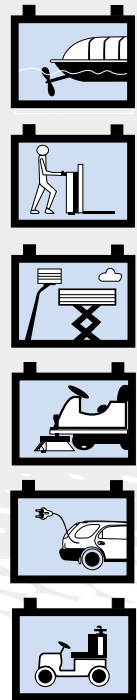

Main technical features and benefits

- Reliable and durable
- Good performance values for medium and low discharge currents
- Vented batteries with positive tubular plates
- Product range
 - 6V and 12V block batteries
 - 48 Ah up to 200 Ah (C₅)
 - 58 Ah up to 235 Ah (C₂₀)
- 900 cycles according to IEC 254-1

Applications

The FT range of batteries are suitable for applications which are used in harsh environments e.g. golf carts, cleaning machines, mobile elevating work platforms, electric elevating-


platform trucks. With Exide Technologies as your partner for system solutions we can also offer optimized chargers for these blocks.

Block batteries with tubular plates – FT range


Technical characteristics and data

Type	Nominal voltage V	Nominal capacity C_5 Ah	Nominal capacity C_{20} Ah	Length (l) mm	Width (b/w) mm	Height (h) mm	Weight kg	Terminal	Terminal position
FT 06 180 1	6	180	210	244	190	275	29	A-Terminal	1
FT 06 180 2	6	180	210	263	182	269	29	A-Terminal	1
FT 06 200	6	200	235	263	182	269	32	A-Terminal	1
FT 12 048	12	48	58	277	175	191	19	A-Terminal	3
FT 12 052	12	52	62	268	170	216	21	A-Terminal	3
FT 12 072	12	72	86	326	174	218	25	A-Terminal	3
FT 12 110	12	110	132	345	174	283	39	A-Terminal	3
FT 12 120	12	120	144	360	253	234	42	A-Terminal	3
FT 12 140	12	140	168	509	216	227	49	A-Terminal	4
FT 12 150	12	150	180	509	216	227	53	A-Terminal	4

Drawings with terminal position, terminal and torque

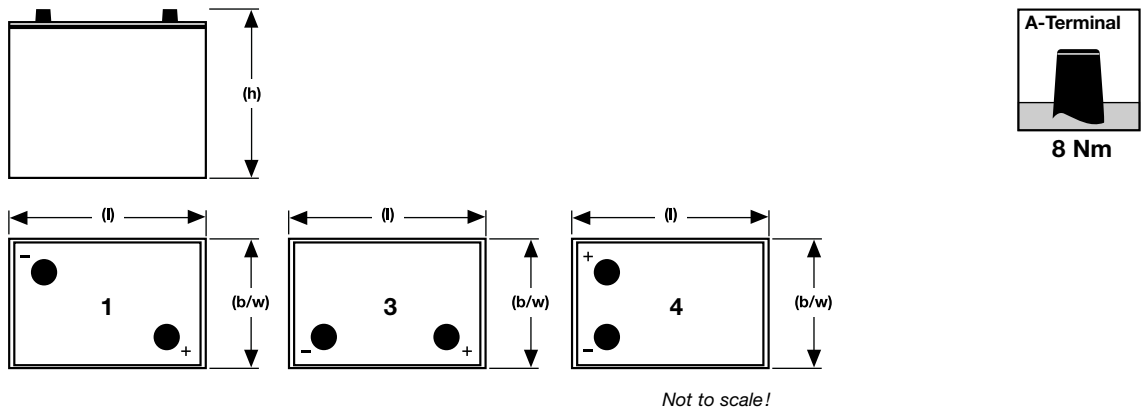

Specifications

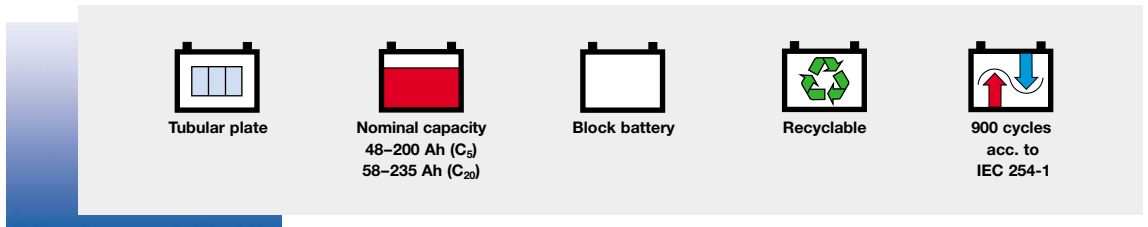

Deutsche EXIDE GmbH
 Im Thiergarten
 63654 Büdingen – Germany

Tel.: +49 (0) 60 42 / 81 454
 Fax: +49 (0) 60 42 / 81 398

www.industrialenergy.exide.com